

## 24V MOTOR DRIVEN ROLLER CONVEYOR QUOTATION WORKSHEET

Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Quote Due \_\_\_\_\_ Desired Delivery \_\_\_\_\_  
 Phone No. \_\_\_\_\_ Contact Email \_\_\_\_\_ State \_\_\_\_\_  
 Omni Sales Contact \_\_\_\_\_ Quote #: \_\_\_\_\_  
 Quantity \_\_\_\_\_

### Product Specs:

Max:  
 - Width (inches): \_\_\_\_\_ Length (inches): \_\_\_\_\_  
 - Height (inches): \_\_\_\_\_ Weight (lbs): \_\_\_\_\_  
 Min:  
 - Width (inches): \_\_\_\_\_ Length (inches): \_\_\_\_\_  
 - Height (inches): \_\_\_\_\_ Weight (lbs): \_\_\_\_\_  
 Description: \_\_\_\_\_  
 Max. Qty.: \_\_\_\_\_ Total Live Load: \_\_\_\_\_  
 Temperature  
 -Environment: \_\_\_\_\_  
 -Product: \_\_\_\_\_

### Roller Specs:

1.9 in. dia. x 16 ga. Galv.  Other: \_\_\_\_\_  
 Coating: \_\_\_\_\_

### Support Type:

Quantity: \_\_\_\_\_  
 Legs  Ceiling Supports TOR \_\_\_\_\_ +/- \_\_\_\_\_

### Application Type:

Transportation  
 Zero Pressure - Zone Length \_\_\_\_\_

### Conveyor Construction:

Between Frame (BF) \_\_\_\_\_  
 Roller C/C \_\_\_\_\_  
 Straight Length: \_\_\_\_\_  
 Curve - Degree: \_\_\_\_\_  
 Inside Radius (I.R.): \_\_\_\_\_  
 Bolt-Together  
 Galvanized  Painted  Powder Coat  
 Color/RAL: \_\_\_\_\_  
 Welded  
 Painted  Powder Coat  
 Color/RAL: \_\_\_\_\_


### Plant Voltage:

110V Single Phase  460V Three Phase  
 220V Single Phase  208V Three Phase  
 220V Three Phase  575V Three Phase

Speed:  
 Fixed \_\_\_\_\_ FPM  
 Variable \_\_\_\_\_ to \_\_\_\_\_ FPM

### Drive Bands:

Standard 83A (50 lbs. Capacity)  
 High Tension 85A (100 lbs. Capacity)  
 Other \_\_\_\_\_

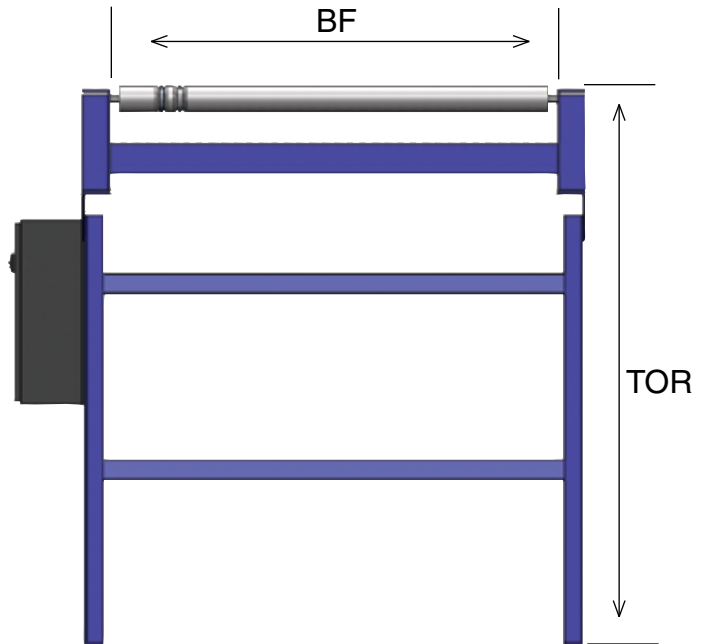

Notes: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Approval Drawing Required:  Yes  No