

Spiraflex HT

- ❖ A high-performance PVC hose designed to maintain maximum flexibility and durability in high temperatures.

Application: Water transfer hose ideal for lawn care applications in hot climates.

Construction:

Tube: Dark green flexible PVC

Reinforcement: Rigid PVC Helix

Temperature Range: 0°F to 160°F (18°C to 70°C)


Branding (Spiral): N/A

Packaging: 100' lengths in poly bags

Stock Sizes: 2", 3", 4", and 6"

Vacuum Capability: Full vacuum up to 150°F

Order Code: 586-564

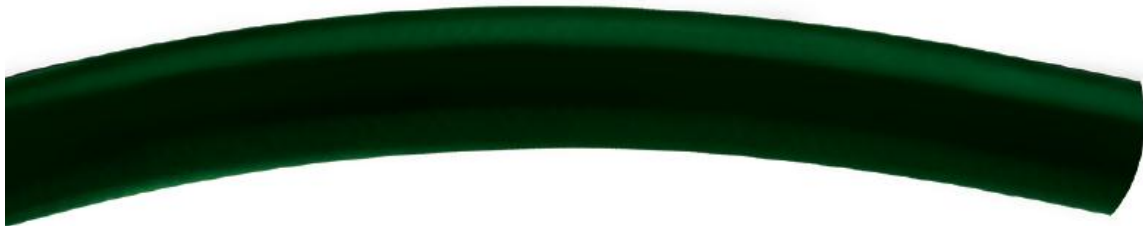

ID		NOM. OD		MAX. WP		WEIGHT		VACUUM HG		BEND RADIUS	
in	mm	in	mm	psi	Mpa	lb/ft	kg/m	in	mm	in	mm
2	50.8	2.4	61.0	79	0.54	0.78	1.05	29	737	8	203
3	76.2	3.49	88.6	65	0.45	1.39	1.89	29	737	12	305
4	101.6	4.54	115.2	55	0.38	2.05	2.79	29	737	16	406
6	152.4	6.8	172.8	47	0.32	5.00	6.81	29	737	22	559